


参考図

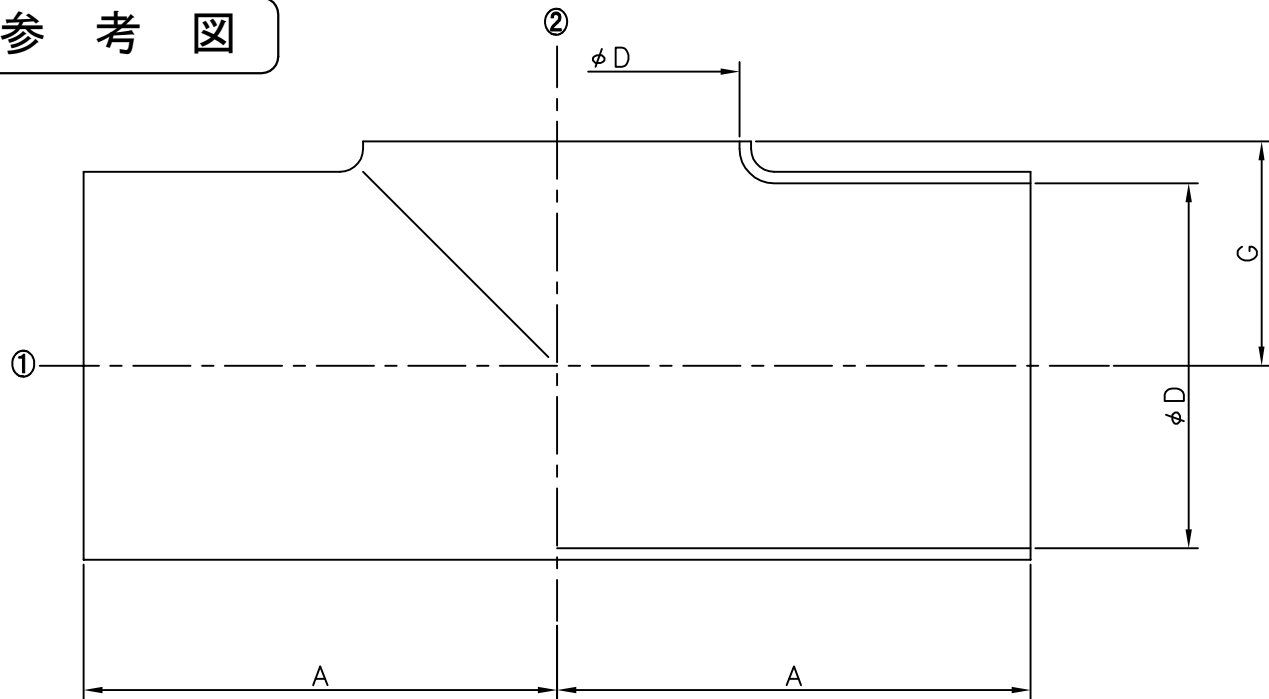

バルブ仕様	
接液部材質	<input type="checkbox"/> SUS304 <input type="checkbox"/> SUS316L
標準仕上	<input type="checkbox"/> 0P <input type="checkbox"/> 1P <input type="checkbox"/> 2P
仕上オプション	<input type="checkbox"/> ODP <input type="checkbox"/> EP (2P)

サイズ	φD	A	G
8A	10.5	38.1	7.5
10A	14.0	38.1	9.1
15A	18.4	38.1	12.0
1	23.0	35	14.0
1 1/2	35.7	50	20.5
2	47.8	62	28.5
2 1/2	59.5	85	35.0
3	72.3	90	42.2
3 1/2	85.1	100	48.5
4	97.6	133.4	54.7
4 1/2	108.3	120	63.9
5	133.8	145	75.6
6	159.2	170	85.0

① \ ②	G											
	8A	10A	15A	1	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5
8A	7.5											
10A	9.1	9.1										
15A	12	12	12									
1	14.2	14.2	14.2	14								
1 1/2	21.3	21.3	21.3	20.5	20.5							
2	28.1	28.1	28.9	28.5	29.6	28.5						
2 1/2	35.5	35.5	35.5	35	35	36	35					
3	42.5	42.5	43.1	42.2	42.9	42.9	42.9	42.2				
3 1/2				49.5	49.5	49.5	49.5	49.5	48.5			
4	55.3	55.3	56.2	55.2	55.2	55.2	55.2	55.2	55.2	54.7		
4 1/2				61.9	61.9	61.9	61.9	62.9	62.9	62.9	63.9	
5				75.6	75.6	75.6	75.6	75.6	75.6	75.6	77	75.6
6				87.5	87.5	87.5	89	89	89	90.9	90	89

TITLE 名称	溶接用継手											
	溶接用チーズ(ローネック) (T-8)											
品名型式												
SCALE 尺度	Free			APPROVE 承認	T. T	検図 CHECK	K. O	製図 DRAWING	N. K			
DRIFT DATE 製図	2018年 3月 6日											
トーステ株式会社 TOSTE Co.,Ltd								DWG No. 親図面番号 KT-18N078				